

USER' S MANUAL

PYLE®

4.2" TFT LCD REAR MIRROR MONITOR WITH BLUETOOTH



BLUETOOTH Annotate

1、 After the unit is ON, the BLUETOOTH signal light flashes every 5 seconds. First connect your cell phone to the unit, password of unit is 8888. After successful connection, the BLUETOOTH light remains constantly on. Incoming call numbers will be displayed on the LCD. (Due to function limit of some cell phones, the number cannot be displayed. However, user still can answer the incoming calls.) Press the BLUETOOTH button on front panel once to answer calls.

2、 When dialing calls, you could speak directly once the other party has accepted the call. Keep the distance no farther than 1 meter from the microphone on front panel for best result.

3. Once your cell phone is connected to the unit, you no longer have to connect again even the power is turned OFF and ON again. (If connection to the unit is failed, please Refer to the cell phone manual for BLUETOOTH connection instruction).

4. There is a BLUETOOTH antenna at the back of the unit, keep it away from GND connection in order to avoid dialing and receiving problems.

5. After phone connection is successful, if conversation is private, press and hold BUETOOTH for 3 seconds to switch to cell phone connection.

6. After cell phone connects to BLUETOOTH, press the BLUE-TOOTH button twice to dial back the last number you have dialed.

1、 Specification:

- | | |
|----------------------------|------------------------------------|
| 1、 Display Size: | 4.2Inch; |
| 2、 Display: | TFT LCD 16:9Panel; |
| 3、 Resolution: | 320×RGB×234; |
| 4、 Brightness: | 400; |
| 5、 Contrast: | 250; |
| 6、 Visual Angle: | 145; |
| 7、 Chromatic System: | NTSC/PAL(Auto Switch); |
| 8、 Working Power: | 12V; |
| 9、 Working Current: | 500mA; |
| 10、 Operation temperature: | 0-45; |
| 11、 Input Port: | One Video Input、 One Camera Input; |

2、 Features:

- 1、 Type of Car: Saloon Car、 Business Car、 Minitype Truck;
- 2、 Installation Measure: Can be Instead of the origin Rearview Mirror Directly;
- 3、 Special Customized Lens in order to be Consistent with the Rearview Image;
- 4、 Auto switch to Rearview system when backing a car to insure the safety.

3、 Caution:

- 1、 Pay Attention to the Polarity when connecting in case of damaging the machine;
- 2、 Do not Dismantle the machine because of its high exactitude, If you have some problem; Please contact with current Distributor.
- 3、 Do not use the cleanser of other impregnate to clean the lens and that you can use soft cloth buff.
- 4、 Avoiding Being laid the machine below the Sunshine, Dust, Humidity;
- 5、 It is common that appear few luminosity in panel;
- 6、 The chromatic system of the camera matched with machine is NTSC system, so in order to avoiding frequently switching display chromatic system, please enact the Chromatic system of DVD or VCD to be NTSC.


4 Front Panel




- 1、 Power Button
- 2、 Mode Button
- 3、 Volume Increasing Button
- 4、 Menu Button
- 5、 Volume Reducing Button
- 6、 Bluetooth Button
- 7、 Microphone
- 8、 Bluetooth Led
- 9、 Caller-ID LCD

5 Instruction of Operating Remote:

- 1、 Volume Reducing Button;
- 2、 Menu Button;
- 3、 Display Mode Select Button;
- 4、 Power Button;
- 5、 Input Switch Button;
- 6、 Volume Increasing Button;



6 The Instruction of Connection:

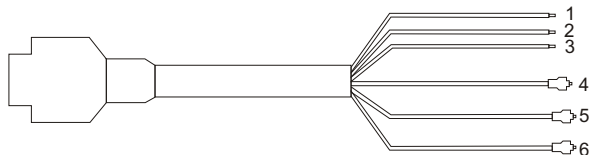

- (1)Power Line(Red):ConnectDC+12V
- (2)Ground Line(Black):Connect Power Line of Ground;
- (3)Rearview control Line(Green):Connect Power Line of Rearview Light;
- (4)Video Input one(Yellow RCA):Connect video input of VCD or DVD;
- (5)Video Input Two(Yellow RCA):Connect Rearview Camera.
- (6)BLUETOOTH Audio output. (White RCA)

7 The Instruction of Installation:

- 1、 Method of Installation:As the following drawing one,sticking the 3M double side pastern on the side which is used for installing the shelf when installing this machine(fittings are attached),then stick the machine directly to the vehicle window.Specially pay attention to:
 - a、 the position of the vehicle window used for sticking up should be cleaned up.Do not leave behind dusty and other sundries in case effecting stickup result.
 - b、 pay attention to throw definite pressure to make the pastern and the stickup face touch adequately to strength the agglutinate.
 - c、 requiring several hours to get the best result after sticking up the plaster, so do not use the machine after several hours of installing the machine.